


StreamJet®

Nozzle No.	Liquid Pressure in psi	Capacity in GPM	Gallons Per Acre - 30" Spacing									
			4 mph	6 mph	8 mph	10 mph	12 mph	14 mph	16 mph	18 mph	20 mph	
H1/4U-SS0004 TP0004-SS	10	.20	9.9	6.6	5.0	4.0	3.3	2.8	2.5	2.2	2.0	
	20	.28	14.0	9.3	7.0	5.6	4.7	4.0	3.5	3.1	2.8	
	30	.35	17.1	11.5	8.7	6.9	5.8	5.0	4.3	3.9	3.5	
	40	.40	19.8	13.2	9.9	7.9	6.6	5.7	5.0	4.4	4.0	
H1/4U-SS0006 TP0006-SS	10	.30	14.9	9.9	7.4	5.9	5.0	4.2	3.7	3.3	3.0	
	20	.42	21.0	14.0	10.4	8.3	7.0	6.0	5.2	4.6	4.2	
	30	.52	25.7	17.2	12.9	10.3	8.6	7.3	6.4	5.7	5.1	
	40	.60	29.7	19.8	14.9	11.9	9.9	8.5	7.4	6.6	5.9	
H1/4U-SS0008 TP0008-SS	10	.40	19.8	13.2	9.9	7.9	6.6	5.7	5.0	4.4	4.0	
	20	.57	28.0	18.7	14.0	11.2	9.3	8.0	7.0	6.2	5.6	
	30	.69	34.3	22.9	17.1	13.7	11.4	9.8	8.6	7.6	6.9	
	40	.80	39.6	26.4	19.8	15.8	13.2	11.3	9.9	8.8	7.9	
H1/4U-SS0010 TP0010-SS	10	0.5	25	16.5	12.4	9.9	8.3	7.1	6.2	5.5	5.0	
	20	0.7	35	23	17.5	14.0	11.7	10.0	8.8	7.8	7.0	
	30	0.9	43	29	21	17.2	14.3	12.3	10.7	9.5	8.6	
	40	1.0	49	33	25	19.8	16.5	14.1	12.4	11.0	9.9	
H1/4U-SS0015 TP0015-SS	10	0.8	37	25	18.6	14.9	12.4	10.6	9.3	8.3	7.4	
	20	1.1	53	35	26	21	17.5	15.0	13.1	11.7	10.5	
	30	1.3	64	43	32	26	21	18.4	16.1	14.3	12.9	
	40	1.5	74	49	37	30	25	21	18.6	16.5	14.9	
H1/4U-SS0020 TP0020-SS	10	1.0	49	33	25	19.8	16.5	14.1	12.4	11.0	9.9	
	20	1.4	70	47	35	28	23	20	17.5	15.6	14.0	
	30	1.7	86	57	43	34	29	24	21	19.1	17.2	
	40	2.0	99	66	49	40	33	28	25	22	19.8	
H1/4U-SS0030 TP0030-SS	10	1.5	74	49	37	30	25	21	18.6	16.5	14.9	
	20	2.1	105	70	53	42	35	30	26	23	21	
	30	2.6	129	86	64	51	43	37	32	29	26	
	40	3.0	148	99	74	59	49	42	37	33	30	
H1/4U-SS0040 TP0040-SS	10	2.0	99	66	49	40	33	28	25	22	19.8	
	20	2.8	140	93	70	56	47	40	35	31	28	
	30	3.5	171	114	86	69	57	49	43	38	34	
	40	4.0	198	132	99	79	66	57	49	44	40	
H1/4U-SS0050	10	2.5	124	82	62	49	41	35	31	27	25	
	20	3.5	175	117	88	70	58	50	44	39	35	
	30	4.3	214	143	107	86	71	61	54	48	43	
	40	5.0	247	165	124	99	82	71	62	55	49	
H1/4U-SS0060	10	3.0	148	99	74	59	49	42	37	33	30	
	20	4.3	210	140	105	84	70	60	53	47	42	
	30	5.2	257	171	129	103	86	73	64	57	51	
	40	6.0	297	198	148	119	99	85	74	66	59	

Stainless Steel for Banding Fertilizers

- Permits banding fluids at high rig speeds.
- Large orifices with no internal obstructions permit non-clogging suspension applications.
- Lower drift potential.
- Coverage tabulation based on water and 30" nozzle spacing.

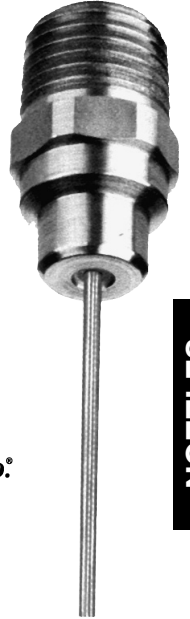


Spraying Systems Co.®

NOZZLES

HOW TO ORDER: Example

TJ/	Description	Price
H1/4U-SS0010	Stainless Steel	10.93
TP0004-SS	Req. Nozzle Cap	10.27

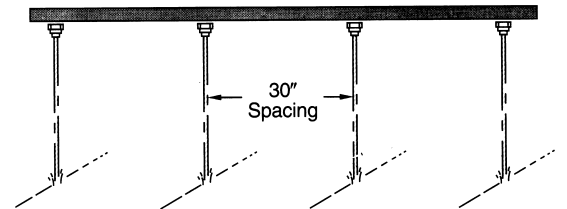

NOTE: Always double check your application rates. See Pages 130 and 131 for useful formulas and information.

